


Rs60

SINGLE SPRING ELASTOMER BELLOWS SEAL

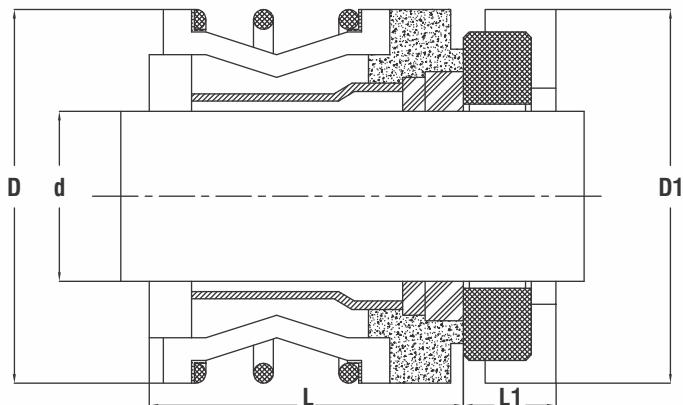

COMMON INDUSTRY	d1 (in)	D	L	D1	L1
100	0.625	1.218	0.718	1.187	0.343
200	0.625	1.218	0.718	1.250	0.406
501	0.750	1.218	0.811	1.250	0.406
518	0.625	1.218	0.718	1.187	0.296
528	0.625	1.218	0.718	1.375	0.562
702	0.625	1.218	0.718	1.187	0.288

FEATURES & BENEFITS:

- ▶ Single Spring, elastomer bellows seal
- ▶ Compact
- ▶ Full convolution bellows gives maximum flexibility
- ▶ Pre-assembled for easy installation
- ▶ Common to many commercial & domestic pumps

OPERATING LIMITS:

- ▶ Pressure: to 75 PSI, 5.2 Bar
- ▶ Temperature: -40°F to +400°F

STANDARD MATERIALS OF CONSTRUCTION:

- ▶ **Faces:**
 - ▶ Carbon Graphite (Resin Impregnated), Phenolic Carbon, Silicon Carbide
- ▶ **Elastomers:**
 - ▶ Buna, Viton®, Neoprene, EPDM
- ▶ **Metallurgy:**
 - ▶ 304, 316