


RS60A

SINGLE SPRING ELASTOMER BELLOWS SEAL

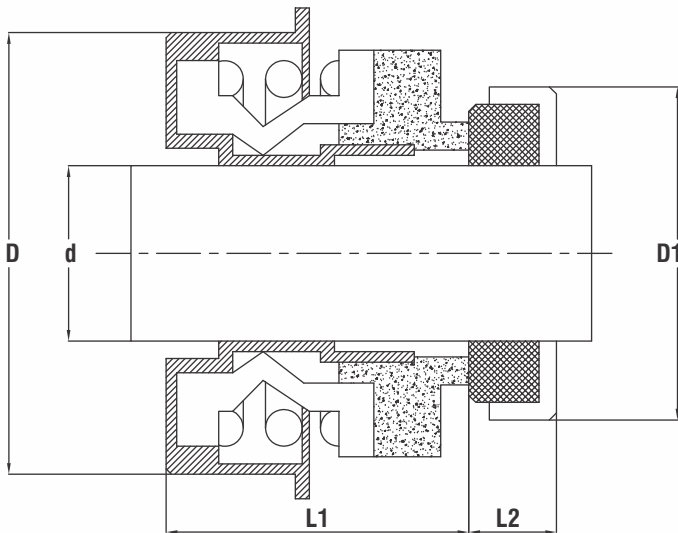

COMMON INDUSTRY	d1 (in)	D	L	D1	L1
PS-600	0.625	1.437	0.615	1.187	0.343
PS-700	0.625	1.437	0.615	1.187	0.288
PS-1000	0.625	1.437	0.615	1.250	0.406
PS-601	0.750	1.575	0.615	1.375	0.406
PS-1619	1.000	1.625	0.874	1.625	0.437

FEATURES & BENEFITS:

- ▶ Full convolution rubber bellows gives maximum flexibility in compensating for shaft movement
- ▶ Coil spring gives consistent face loading
- ▶ Seal face torsional movement is restricted by anti-rotation dent & groove
- ▶ Pre-assembled for easy installation
- ▶ Common to many commercial & domestic pumps

OPERATING LIMITS:

- ▶ Pressure: to 75 PSI
- ▶ Temperature: -40°F to +400°F

STANDARD MATERIALS OF CONSTRUCTION:

- ▶ **Faces:**
 - ▶ Carbon Graphite (Resin Impregnated), Phenolic Carbon, Silicon Carbide
- ▶ **Elastomers:**
 - ▶ Buna, Viton®, Neoprene, EPDM
- ▶ **Metallurgy:**
 - ▶ 304, 316