







QUALITY | COMMITMENT | ADAPTABILITY

PRODUCT LINE CARD



ANSI FRAME MOUNTED PUMPS




1196 Series ANSI Pumps

Key Features

- Designed & Manufactured to meet ANSI / ASME B73.1 Standard
- Semi Open Impeller
- Available in Various MOC: DI, SS, CD4, A20, HC, NI and more
- Pumps and Parts interchangeable with other ANSI Brands

Design Specifications

- Max Flow Upto 1590 m³/h (7000 GPM)
- Max Head Upto 223 m (730 ft)
- Max Temperature 371° C (700° F)




1196LF Series ANSI Low Flow Pumps

Key Features

- Designed & Manufactured to meet ANSI / ASME B73.1 Standard
- Semi Open Impeller
- Designed to meet Low flow and High Head Applications
- Available in Various MOC: DI, SS, CD4, A20, HC, NI and more
- Pumps and Parts interchangeable with other ANSI Brand

Design Specifications

- Max Flow Upto 50 m³/h (220 GPM)
- Max Head Upto 282 m (925 ft)
- Max Temperature 371° C (700° F)



1796 Series ANSI Self Priming Pumps


Key Features

- Designed & Manufactured to meet ANSI / ASME B73.1 Standard
- Self Priming
- Available in Various MOC: DI, SS, CD4, A20, HC, NI and more
- Pumps and Parts interchangeable with other ANSI Brands

Design Specifications

- Max Flow Upto 284 m³/h (1250 GPM)
- Max Head Upto 131 m (430 ft)
- Max Temperature 260° C (500° F)

ANSI CLOSE COUPLED PUMPS



1296 Series ANSI Close Coupled Pumps

Key Features


- Close coupled Compact Design
- Semi Open impeller
- Various sealing options T1, Cartridge seals, gland packed
- Various Flush plans options
- Available in various MOC such as DI, CS, SS, CD4MCUN

Design Specifications

- Max Flow Upto 1000 m³/h (4403 GPM)
- Max Head Upto 222 m (730 ft)
- Max Temperature 120° C (248° F)

Applications

- Water & Waste Water & Sea Water • Coal Pile Drainage • Oil & Gas • Chemical, Petro-Chemicals & Petroleum Transfer • HVAC • Hot Oil & Boiler Feed
- Condensate • Mining • Industrial Sump • Bilge Water Removal & Filter • Transfer Car Unloading • Column Bottoms & Reflux • Petro-Chemicals & Refineries
- Medical • Food, Chemical & High Pressure Process




1296LF Series Low Flow ANSI Close Coupled Pumps

Key Features

- Low Flow High head Close coupled Compact Design
- Semi Open impeller
- Various sealing options T1, Cartridge seals, gland packed
- Various Flush plans options
- Available in various MOC such as DI, CS, SS, CD4MCUN

Design Specifications

- Max Flow Upto 48 m³/h (211 GPM)
- Max Head Upto 275 m (902 ft)
- Max Temperature 120° C (248° F)



1796CC Series Self Priming ANSI Close Coupled Pumps

Key Features

- Self Priming Close coupled Compact Design
- Semi Open impeller
- Various sealing options T1, Cartridge seals, gland packed
- Various Flush plans options
- Available in various MOC such as CS, SS, CD4MCUN

Design Specifications

- Max Flow Upto 275 m³/h (1211 GPM)
- Max Head Upto 120 m (394 ft)
- Max Temperature 120° C (248° F)

VERTICAL PUMPS



RV180 Series Vertical In-line Pumps

Design Specifications

- Max Flow Upto 100 m³/h (440 GPM)
- Max Head Upto 60 m (197 ft)
- Max Temperature 121° C (250° F)

Applications

- Pressure Boosting Systems • Apartment Building
- Industrial Process Systems • General Circulating Water Services • Heating and Air Conditioning



RVMS Series Vertical Multistage Centrifugal Pumps

Design Specifications

- Max Flow Upto 240 m³/h (1057 GPM)
- Max Head Upto 1000 m (3281 ft)
- Max Temperature 120° C (248° F)

Applications

- Water supply • Industrial
- Water Treatment • Irrigation




RVT Series Vertical Turbine Pumps

Applications

- City Water & Municipality • Water & Waste Water
- Irrigation & HVAC • Apartment Building
- Effluent Treatment • Cooling Tower • Circulating Water & Chillers • Petro-Chemicals & Refineries
- Pharmaceutical

HORIZONTAL CENTRIFUGAL PUMPS



RoChem Frame Mounted End Suction Pumps

Key Features

- Closed impeller, Premium Efficiency
- Various sealing options T1, Cartridge seals, gland packed
- Various Flush plans options
- Available in various MOC such as DI, CS, SS, CD4MCUN

Design Specifications

- Max Flow Upto 1450 m³/h (6384 GPM)
- Max Head Upto 230 m (754 ft)
- Max Temperature 400° C (752° F)

Applications

- Oil & Gas, Refineries, Chemical, petro-Chemical, Food & Beverage Industry • Power Plants, water & waste water, Paper-Pulp Industry • Sugar Industry



RoTherm Series, Hot Oil Pumps

Key Features

- Available in ANSI and DIN Flanges
- All Dimensions in Inch for North America
- Optional: Centerline Mounting
- Designed for hot fluid transfer

Design Specifications

- Max Flow Upto 1450 m³/h (6384 GPM)
- Max Head Upto 230 m (754 ft)
- Max Temperature 400° C (752° F)

Applications

- Oil & Gas, Refineries, Chemical, petro-Chemical, Food & Beverage Industry • Power Plants, water & waste water, Paper-Pulp Industry • Sugar Industry



DN Series Frame Mounted Centrifugal End Suction Pumps

Key Features

- Designed to meet DIN 24255
- Available in ANSI Flanges
- All Dimensions in Inch for North America
- Available in All Iron, CI/BR Fitted MOC

Design Specifications

- Max Flow Upto 681 m³/h (3000 GPM)
- Max Head Upto 122 m (400 ft)
- Max Temperature 93° C (200° F)

Applications

- Water & Waste Water • Irrigation & HVAC
- Condensate • City Water & Municipality
- Apartment Building • Sea Water
- Effluent Treatment & Cooling Tower



RoChemCC Close-Coupled Centrifugal End Suction Pumps

Key Features

- Close coupled Compact Design
- Closed impeller, Premium Efficiency
- Various sealing options T1, Cartridge seals, gland packed
- Various Flush plans options
- Available in various MOC such as DI, CS, SS, CD4MCUN

Design Specifications

- Max Flow Upto 450 m³/h (1981 GPM)
- Max Head Upto 100 m (328 ft)
- Max Temperature 150° C (302° F)

Applications

- Water & Waste Water • Irrigation & HVAC
- Condensate • Municipality • High Pressure Process
- Apartment Building • Effluent Treatment & Cooling Tower • Sea Water • Chillers
- Petro-Chemicals & Refineries • Pharmaceutical



DNJ Series Close-Coupled Centrifugal End Suction Pumps

Key Features


- Designed to meet DIN 24255
- Closed Coupled to NEMA frame motors
- Available in ANSI Flanges
- All Dimensions in Inch for North America
- Available in All Iron, CI/BR Fitted MOC

Design Specifications

- Max Flow Upto 522 m³/h (2300 GPM)
- Max Head Upto 122 m (400 ft)
- Max Temperature 93° C (200° F)

Applications

- Water & Waste Water • Irrigation & HVAC
- Condensate • Municipality
- High Pressure Process
- Apartment Building • Effluent Treatment & Cooling Tower • Sea Water • Chillers
- Petro-Chemicals & Refineries • Pharmaceutical



RHS Series Split Case Pumps

Rotech RHS Series pumps are Frame Mounted pumps available in various material of construction such as all iron, cast iron bronze fitted, all stainless steel construction.

Design Specifications

- Max Flow Upto 11600 m³/h (51073 GPM)
- Max Head Upto 200 m (656 ft)
- Max Temperature 105° C (221° F)

Applications

- Water & Waste Water • Irrigation & HVAC
- Condensate • Municipality • High Pressure Process
- Apartment Building • Effluent Treatment & Cooling Tower • Sea Water • Chillers
- Petro-Chemicals & Refineries • Pharmaceutical



RCP Series Close-Coupled Centrifugal End Suction Pumps

Key Features

- NPT / BSP Threaded Connections
- Close coupled
- Light duty chemical pump
- Semi-open impeller

Design Specifications

- Max Flow Upto 18 m³/h (80 GPM)
- Max Head Upto 30 m (100 ft)
- Max Temperature 93° C (200° F)

Applications

- Water & Waste Water • Glycol • Light Chemical
- Chillers • City water & Municipality
- Apartment Building • Effluent Treatment
- Cooling Tower • Pharmaceutical • Circulating Water & Chillers • Petro-Chemicals & Refineries



RGH Series Gear Pumps

A gear pump employs a system of meshing of gears to move fluids. Because of the mechanism involved, gear pump qualify as positive displacement pump. For every revolution the gear pump make, The same amount of fluid is moved.

Design Specifications

- Max Flow Upto 100 m³/h (440 GPM)
- Max Pressure Upto 500 psi
- Max Temperature 200° C (392° F)

Applications

- Petro-Chemicals • Chemicals • Paint And Ink
- Resins And Adhesives • Pulp And Paper
- Food Industries



1600 Series Close-Coupled Centrifugal End Suction Pumps

Key Features

- NPT / BSP threaded connection
- Close Coupled
- Light duty
- Semi-open impeller

Design Specifications

- Max Flow Upto 59 m³/h (260 GPM)
- Max Head Upto 49 m (160 ft)
- Max Temperature 93° C (200° F)

Applications

- Deionized Water • DAF (Dissolved Air Flotation)
- General Pumping • Waste-Water Treatment
- Food, Beverages & Chemical Process

HORIZONTAL SELF PRIMING CENTRIFUGAL PUMPS



SFP Series Self-Priming Centrifugal Pumps

Key Features


- Self Priming
- NPT Threaded Connections
- Available in CI, Bronze, Stainless and Duplex Stainless

Design Specifications

- Max Flow Upto 73 m³/h (320 GPM)
- Max Head Upto 44 m (145 ft)

Applications

- Oil & Gas • Petro-Chemicals & Refineries • Boiler Feed • Condensate
- High Pressure Process • Column Reflux & Bottoms • Hot Oil • Sea Water



SCP Series Self-Priming Close Coupled Centrifugal Pumps

Key Features

- Self Priming
- NPT Threaded Connections
- Available in CI, Bronze, Stainless and Duplex Stainless

Design Specifications

- Max Flow Upto 45 m³/h (200 GPM)
- Max Head Upto 24 m (80 ft)

Applications

- Water & Waste Water • Apartment Building & HVAC
- City Water & Municipality • Effluent Treatment • Circulating water & Chillers
- Petro-Chemicals • Sea Water • Refineries & Pharmaceutical • Condensate
- Industrial Chemical Waste & Sugar Industries



SPT/SXT Self-Priming Trash Pumps

Key Features

- High Flow Low head
- Solid handling capability
- 2 vaned open impeller
- Self Priming

Design Specifications

- Max Flow Upto 1249 m³/h (5500 GPM)
- Max Head Upto 37 m (120 ft)

Applications

- Effluent Treatment & Cooling Tower • Water and Waste Treatment
- Municipality & City Water • Circulating water & Chillers • Sewage Lift Station
- Industrial Chemical Waste • Industrial Chemical Waste • Sugar Industries
- Petro-Chemicals • Refineries & Pharmaceutical



SPU/SXU Self-Priming Trash Pumps

Key Features

- High Head Pumps
- 5 vaned open impeller
- Self Priming

Design Specifications

- Max Flow Upto 295 m³/h (1300 GPM)
- Max Head Upto 61 m (200 ft)

Applications

- Effluent Treatment & Cooling Tower • Sewage Lift Station
- Water and Waste Treatment • Municipality & City Water
- Circulating Water & Chillers • Industrial Chemical Waste
- Industrial Chemical Waste • Sugar Industries • Petro-Chemicals
- Refineries & Pharmaceutical • Irrigation • HVAC & Apartment Building

FOOD PROCESS PUMPS



S100 Series Sanitary Centrifugal Pumps


S100 series pumps sanitary Centrifugal pumps are designed to use for Food, Beverage & Pharmaceutical Industries for their various products applications.

Design Specifications

- Max Flow Upto 120 m³/h (528 GPM)
- Max Pressure Upto 7 bar (102 psi)
- Max Temperature 120° C (248° F)

Applications

- Design based on hygienic standard • Adjustable Stainless Steel Leg
- Mechanical Seal : Single, Flushed Single, Flushed Double • Food • Dairy
- Healthcare



L100 Series Lobe Pumps

Rotech L100 Series Lobe Pumps are designed to use for Food, Pulp & Paper, Chemical, Beverages, Pharmaceuticals & Biotechnology Industries for their various products applications.

Design Specifications

- Max Flow Upto 90 m³/h (395 GPM)
- Max Pressure Upto 12 bar (174 psi)
- Max Temperature 150° C (302° F)

Applications

- Sanitary Food Applications
- High Viscous Fluid like Cheese, Sugar, Honey, Chemical, Chemical Waste, Lime Slurry, Coffee Liquor, Syrup, Ketchup, Tea, Ice Cream, Icings, Milk etc.
- Polymers • Paper Coatings • Paints & Dyes • Rubber & Adhesives
- Pharmaceuticals

POSITIVE DISPLACEMENT PUMPS



Rotech Progressive Cavity Pumps

Rotech Progressive Cavity Pumps are designed to use for Food & Beverages, Chemicals, Pharmaceuticals, Oil & gas and many more various applications. The main components which characterize the metallic fixed single rotor & double helical polyme resistant part.

Design Specifications

- Max Flow Upto 200 m³/h (880 GPM)
- Max Pressure Upto 24 bar (348 psi)
- Max Temperature 150°C (302°F)

Applications

- Sewage • Effluent & Water Sugar • Distillery & Brewery • Paper & Pulp
- Cellulose • Ceramics & Refractories • Bulk Explosives & Emulsions
- Chemicals • Construction • Engineering • Fertilizer • Marine Mining
- Man-Made Fibre • Oil & gas 1 Paint & Varnish • Ship Building Industries

VERTICAL PUMPS



RVS Series Vertical Sump Pump

Key Features

- Semi Open Impeller
- Interchangeability within series
- Available in various MOC

Design Specifications

- Max Flow Upto 400 m³/h (1761 GPM)
- Max Pressure Upto 70 m (230 ft)
- Max Temperature 232° C (450° F)

Applications

- Industrial Process • Industrial Process Sump Water
- Molten Sulphur • Tank Unloading • Corrosive & Non-Corrosive Liquids

BALL CHECK VALVES



Model 3100

Key Features

- Horizontal / Vertical Mounting
- NPT / BSP Threaded
- Free floating Rubber Ball
- Easy in maintenance

Design Specifications

- Max Pressure Upto 10 bar (145 psi)
- Max Temperature 90° C (194° F)

Applications

- Water & Waste Water



Model 5100

Key Features

- Horizontal / Vertical mounting
- ASME B16.5 Flange
- Free Floating Ball
- Easy in Maintenance

Design Specifications

- Max Pressure Upto 10 bar (145 psi)
- Max Temperature 90° C (194° F)

Applications

- Water & Waste Water

ACCESSORIES




Bearing Isolator



Coupling



Base Frame



Coupling Guard

MECHANICAL SEALS



1. Elastomer Bellow Seals :

- RS21 • RS1 • RS2 • RS60
- RS60A • RS210 • RS157

2. Elastomer O - Ring Seat :

- RS801 / 801T • RS8B2
- RS260 / 261 • RS307
- RS655 / 656 / 657 / 658
- RS678 • RS683 / 684 • RS884

3. Metric Seals :

- RS21 • RSMG1 & RSMG12
- RS515 • RS5H2 • RS301
- RS210 • RS43 • RS620
- RM70N / 74N

4. Cartridge Seal :

- RSCS1 • RSS1CVD
- RSCS1 BB • RSCS1WBC
- RSCD2PR • RSHDS • RS908

5. PTFE Wedge Seals :

- RS901 / 901T

6. PTFE Bellow Seals :


- RS253 / 254 • RS2B

7. Balanced seals :

- RS1B • RS675 / 677
- RS642 / 647

8. OEM Replacement After market Seals :

- Armstrong • B & G • APV
- Flygt • Viking • Ampco
- Alfa Laval • Blackmer • KSB
- Grundfos • Peerless • Goulds
- Rotojet • Hydrostal • Fristam

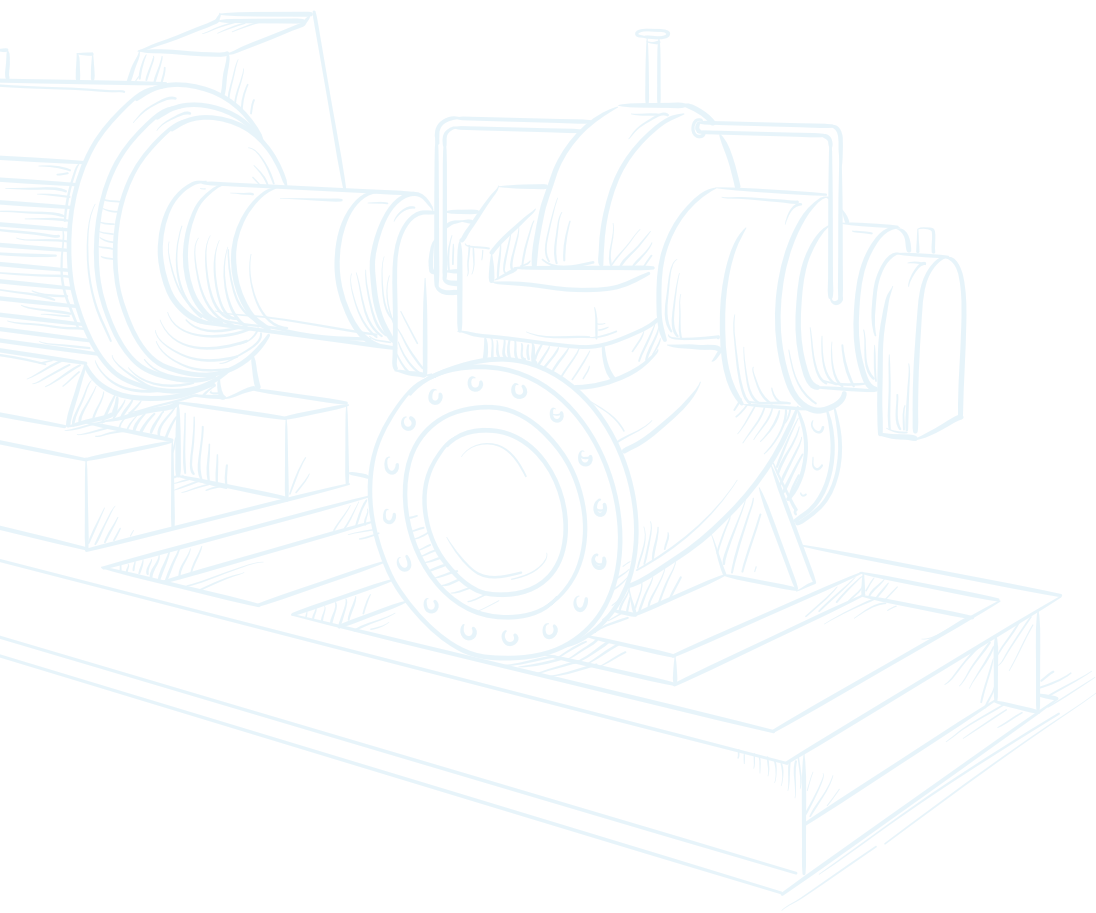

ROTECH

QUALITY | COMMITMENT | ADAPTABILITY

CANADA

Head Quarter

1180 Britannia Road East,
Mississauga, Ontario - L4W1C8, Canada

USA

Head Quarter

4555 Brittmoore Road
Houston, Texas - 77041 USA

☎ 905 - 461 - 9617 📠 905 - 461 - 9618

🌐 1 - 866 - 217 - 7867 (PUMP)

sales@rotechpumps.com

www.rotechpumps.com